


CENTRALE ASPIRANTE


CENTRAL VACUUM UNIT

EC350
Code AS546

vista laterale
lateral views

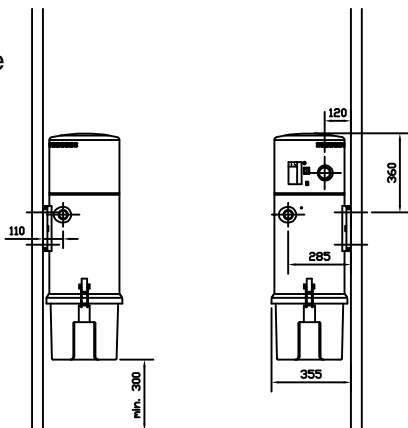

vista frontale
frontal view

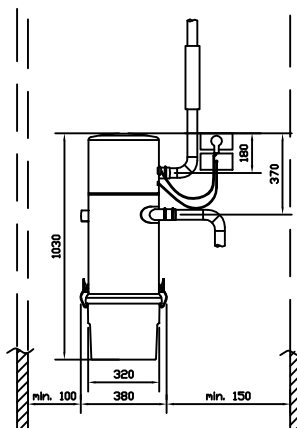

OPERATORI CONSIGLIATI: 1

SIMULTANEUS OPERATORS : 1

CARATTERISTICHE TECNICHE

TECHNICAL SPECIFICATIONS

ALIMENTAZIONE	POWER SUPPLY	Volt	230
POTENZA MOTORE	MOTOR POWER	Kw/Hp	1.60/2.14
GIRI MOTORE MAX.	MAX. MOTOR REVOLUTIONS	rpm	25760
STADI MOTORE	MOTOR STAGES	n.°	3
DEPRESSIONE MAX.	MAX. VACUUM	mm ₂ H O	3440
PORTATA ARIA MAX.	MAX.AIR CAPACITY	m ³ /h	175
MATERIALE CARTUCCIA FILTRO	FILTER CARTRIDGE MATERIAL	poliestere / polyester	
SUPERFICIE FILTRANTE	FILTER SURFACE	cm ²	8000
CAPACITA' CONTENITORE POLVERI	DUST CONTAINER CAPACITY	Lt.	23
ALTEZZA CENTRALE ASPIRANTE	VACUUM UNIT HEIGHT	H mm	1030
DIAMETRO CENTRALE ASPIRANTE	VACUUM UNIT DIAMETER	Ø mm	320
DIAMETRO BOCCHETTONE INGRESSO POLVERI	DUST INLET DIAMETER	Ø mm	50
DIAMETRO BOCCHETTONE ESPULSIONE	EXHAUST VALVE DIAMETER	Ø mm	50
RUMOROSITA'	NOISE	Db (A)	64
PESO	WEIGHT	Kg	19

I valori di depressione e portatad'aria sono stati ottenuti in laboratorio e vanno considerati con una tolleranza del 10% se misurati in cantiere.
The values in depression and air capacity are obtained in laboratory so they must be considered with a tolerance of 10% if they are measured in yard.

SUPERFICIE MASSIMA CONSIGLIATA	MAX. SURFACE TO BE COVERED	m ²	400
NUMERO MASSIMO PUNTI PRESA	MAX. NUMBER OF INLET VALVE LOCATIONS		16
LIVELLI O PIANI DELLO STABILE	LEVELS OR STOREYS OF THE BUILDING		2-3

AIRBLU

Via del lavoro, 21A - 47035 GAMBETTOLA (FC) - ITALY
Tel.+39 0547 59308-Fax +39 0547 657683
<http://www.airblu.com> - E-mail:info@airblu.com